




JQX-13F (LY1)

JQX-13F (LY2)



13F (LY1) 13F (LY2)

触点参数

触电形式	1Z、1H、1D、2Z、2H、2D、
接触电阻	≤100mΩ (1A 6VDC)
触点材料	AgCdO AgSnO ₂
触点负载	15A 250VAC/28VDC 10A 250VAC/28VDC
线圈参数	
额定线圈功率	0.9W/1.2VA

性能参数


绝缘电阻	≥500MΩ (500VDC)
介电耐压	线圈与触点间 ≥1500VAC 1min 断开触点间 ≥1000VAC 1min 触点组间 ≥1500VAC 1min
吸合/释放时间	≤25ms/25ms
引出端方式	线路板和插座安装

DC 线圈规格表


额定电压	吸合电压	释放电压	线圈电阻
VDC	VDC	VDC	Ω ±10%
5	4.0	0.5	28
6	4.8	0.6	40
12	9.6	1.2	160
24	19.2	2.4	640
48	38.4	4.8	2560
110	88.0	11.0	12100

AC 线圈规格表

额定电压	吸合电压	释放电压	线圈电阻
VAC	VAC	VAC	Ω ±10%
6	4.8	1.8	12
12	9.6	3.6	42
24	19.2	7.2	168
48	38.4	14.4	675
110	96.0	36.0	3500
220/240	176.0	66.0	14000/16500

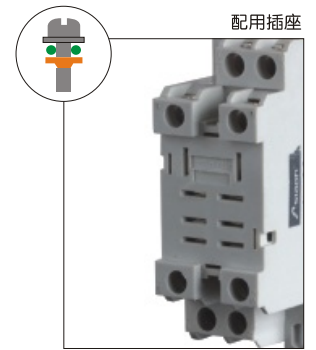

PTF08A-E



外形尺寸、安装孔尺寸（底视图）、接线图（底视）

